


Description:

- ☆ Extremely Strong and Durable
- ☆ High Tensile and Tear Strength
- ☆ Anti-Mildew / Anti-Microbial Treatments & U.V. Pigments
- ☆ Fire Retardant
- ☆ Phthalate and Lead Compliant
- ☆ Leather Grain Finish

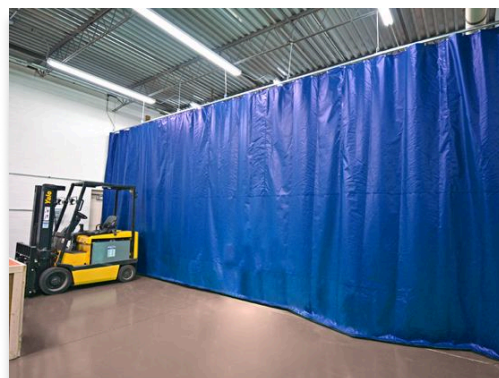

Details:

CATEGORY	TEST RESULT	TEST METHOD
TOTAL WEIGHT	14 oz. per yard ²	FS 5040 / ASTM D3776
WIDTH	61"	
YARN	Polyester	
CONSTRUCTION	9 x 9/1" by 1000 x 1000	
GRAB TENSILE	365 x 348 lbs/1"	FS 5100 / ASTM D5034
TONGUE TEAR	92 x 83 lbs.	FS 5134 / ASTM D2261
ADHESION	28 lbs./2"	FS 5970 / ASTM D751
COLD CRACK	-4° F	FS 5874 / ASTM D2136
F.R. TREATMENTS	Pass	CSFM / NFPA - 701 ASTM E-84
TREATMENTS	UV, Anti-microbial, Anti-bacterial, Anti-mildew, Anti-mold.	
FINISH	Leather	
PUT UP	75 yards	

The following information in regards to the chemical and physical properties of this product is based upon reliable testing methods. While reliable, these statistics are intended only as an informational source for your benefit. These statistics are however, provided only as a convenience and do not constitute a warranty and/or guarantee. The Purchaser is still required to determine if the product represented meets the individual needs of the Purchaser.